



NO.	Item	Specification	Condition
1	Rated Voltage	5V DC	
2	No. of Phase	2-phase	
3	Resistance Per Phase	$11 \pm 10\% \Omega$	At 20°C
4	Inductance Per Phase	$8.6 \pm 20\% \text{mH}$	
5	Current Per Phase	0.46A	
6	Travel Per Step Avail	0.0254mm	
7	The Mark Thrust	55N	At 100Hz
8	The Mark Pull	55N	At 100Hz
9	After All Journey	$\geq 75\text{mm}$	
10	Operating Temp Range	$-40^\circ\text{C} \sim 125^\circ\text{C}$	
11	Protection Rate	IP34	
12	Insulation Resistance	$>100\text{M}\Omega$	Winding to the crust
13	Life	1,500,000 return	(a cycle) advance 39mm, backing out 39mm
14	Lead Wrie	AF-200	
15	Weight	86g	
16			



Pin No.	WIRE COLOR	STEP			
		1	2	3	4
1	YEL	-	-	-	-
2	RED	-	-	-	-
3	RED	-	-	-	-
4	YEL	-	-	-	-
5					
6					

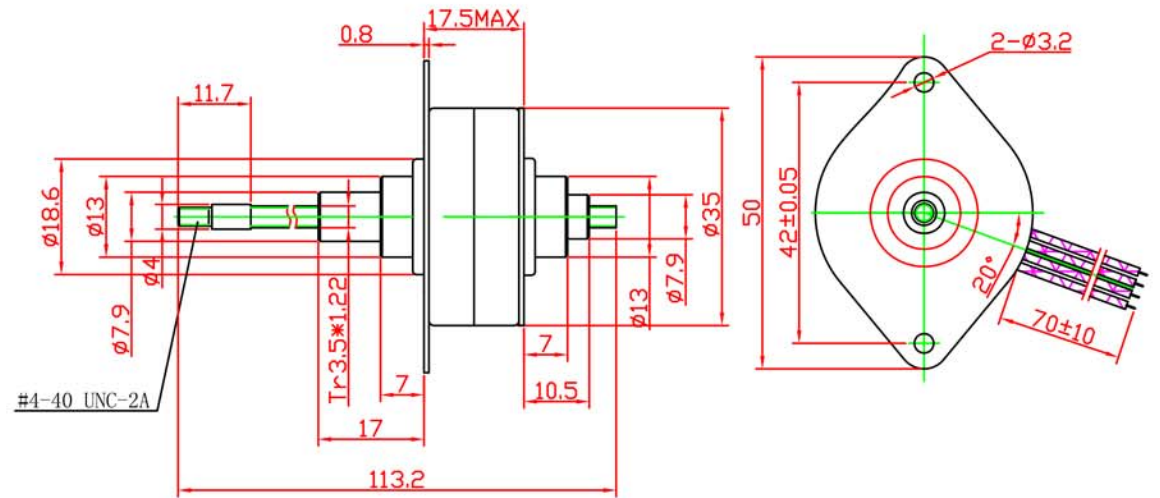

PROMOCO
www.promoco-motors.com

35BYZ-B01