


### Hybrid Stepper Motor

- Standard NEMA Sizes
- 28mm–110 mm
- (Holding) Torque up to 23 Nm
- High Efficiency Hybrid Stepper
- Linear Hybrid Stepper
- Geared Stepper

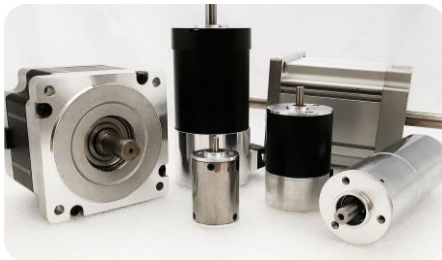

### BLDC Motor

- Servomotor
- Round Type and NEMA Sizes
- 28 mm–110 mm
- Power up to 1000W
- Geared BLDC Motors
- BLDC Motors with Integrated Driver
- Outer Rotor Motor



### DC Motor

- Low Cost to High Performance Range
- Small Motors and PM Servo Motors
- 20mm–110 mm
- Power up to 700W
- DC-Gear Motors
- Options



### Gearboxes

- Manufactured In-House
- Planetary, Spur and Worm Gearboxes
- Low Cost to High Performance Range
- Available for DC, Stepper and BLDC Motors
- Special and Customized Gearboxes



### Motor Options

- Cables and Connectors
- Special Shaft and Pinions
- Encoder and Feed-back Devices
- Bearing Systems: Ball and Sleeve Bearings
- Brushes and Commutator (DC)
- EMC/EMI Suppression
- Sealed Motors/IP Protection
- Customized Motors